




Technical Data

**FRAMELESS
STAINLESS STEEL
MIRROR**

**B-1556
SERIES**

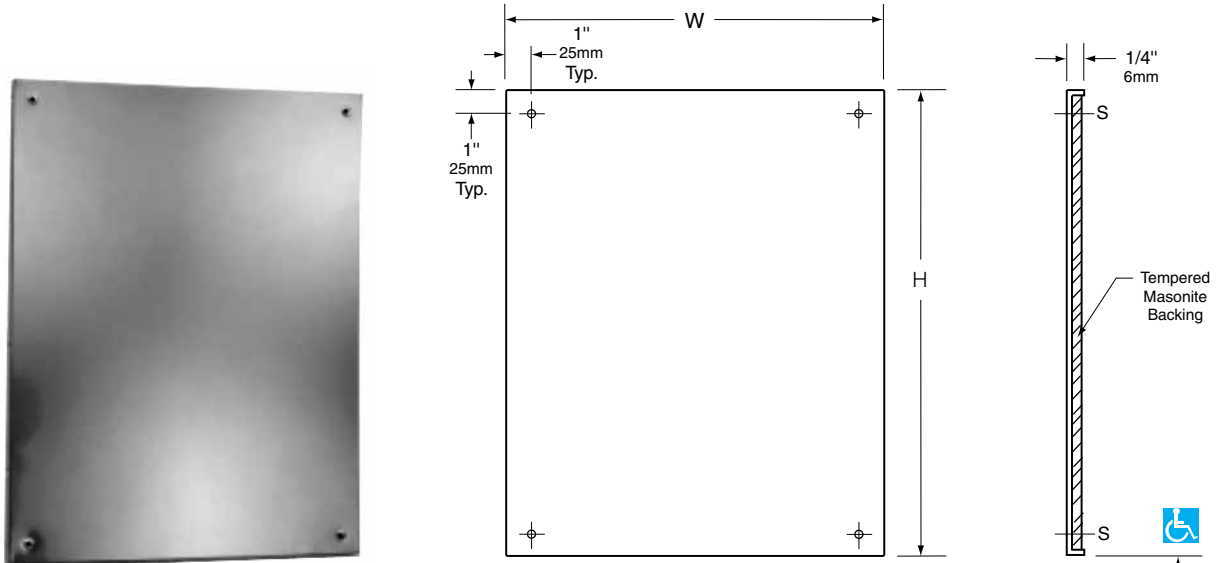

STANDARD B-1556 SERIES MIRRORS

| Model No. | Overall Size | | Number of Mounting Screws |
|-------------|-----------------|-----------------|---------------------------|
| | (W) | (H) | |
| B-1556 1620 | 15-1/2" (394mm) | 19-1/2" (495mm) | 4 |
| B-1556 1824 | 17-1/2" (445mm) | 23-1/2" (597mm) | 4 |
| B-1556 1830 | 17-1/2" (445mm) | 29-1/2" (749mm) | 4 |
| B-1556 2436 | 23-1/2" (597mm) | 35-1/2" (902mm) | 4 |

Recommended Mounting Height Off Floor
for Barrier-Free Design
40" Max. 1015mm

MATERIALS:

Mirror — 22-gauge (0.8mm), type-430 stainless steel with bright polished finish. Mirror has 1/4" (6mm) return.

Backing — 1/4" (6mm) thick tempered masonite.

INSTALLATION:

Mount mirror on wall with screws, furnished by manufacturer, at points indicated by an S. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws furnished, or provide 1/8" (3mm) toggle bolts or expansion bolts.

SPECIFICATION:

Frameless stainless steel mirror shall be type-430 stainless steel with bright polished finish. Mirror shall have 1/4" (6mm) return concealing 1/4" (6mm) tempered masonite backing. Mirror shall be furnished with mounting screws and finishing washers.

Mirror shall be Model B-1556 _____ (insert width and height) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.