




Technical Data

TrimLineSeries™ SEMI-RECESSED PAPER TOWEL DISPENSER AND WASTE RECEPTACLE

B-390034

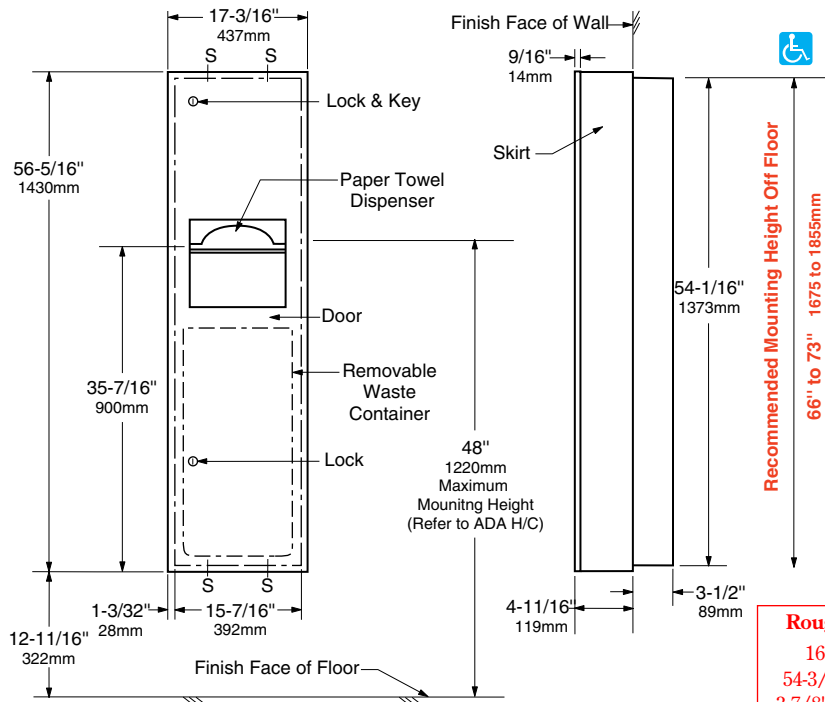

Recommended Mounting Height Off Floor
66" to 73" 1675 to 1855mm

Rough Wall Opening
 16" (406mm) wide
 54-3/4" (1390mm) high
 3-7/8" (98mm) minimum recessed depth

MATERIALS:

Cabinet & Flange — 18-8 S, type-304, heavy-gauge stainless steel. All-welded construction. Exposed surfaces have satin-finish.

Skirt — 18-8 S, type-304, heavy-gauge stainless steel with satin-finish.

Door — 18-8 S, type-304, 18-gauge (1.2mm) stainless steel with satin-finish. 9/16" (14mm) 90° return edges for maximum rigidity. Secured to cabinet with a concealed, full-length stainless steel piano-hinge. Equipped with two tumbler locks keyed like other Bobrick washroom accessories.

Paper Towel Dispenser — 18-8 S, type-304, 22 gauge (0.8mm) stainless steel with satin-finish. Rounded towel tray has hemmed opening to dispense paper towels without tearing. Capacity: 600 C-fold, 800 multifold, or 1100 singlefold paper towels.

Waste Container — Removable, leakproof, rigid molded plastic. Capacity: 12-gal. (45.4-L).

OPERATION:

Paper towel dispenser adjusts to accommodate C-fold, multifold, or singlefold paper towels by repositioning built-in adapter in one of six tabs. No additional towel trays or adapters required. Waste receptacle is serviced by opening door and removing waste container.

INSTALLATION:

Provide framed rough wall opening 16" wide x 54-3/4" high (406 x 1390mm). Minimum depth required from finish face of wall is 3-7/8" (98mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between skirt and finish face of wall. Mount unit in wall opening with shims between framing and cabinet at all points indicated by an S, then secure unit with #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws (not furnished by manufacturer).

SPECIFICATION:

Semi-recessed paper towel dispenser and waste receptacle shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Door shall be 18 gauge (1.2mm); have 9/16" (14mm) 90° return edges; be secured to cabinet with a concealed, full-length stainless steel piano-hinge; and equipped with two tumbler locks keyed like other Bobrick washroom accessories. Paper towel dispenser shall be equipped with a six-position adapter that is adjustable to dispense 600 C-fold, 800 multifold, or 1100 singlefold paper towels. Waste receptacle shall be furnished with a removable, leakproof, rigid molded plastic waste-container with a minimum capacity of 12-gal. (45.4-L). Manufacturer's service and parts manual shall be provided to the building owner/manager upon request.

Semi-Recessed Paper Towel Dispenser And Waste Receptacle shall be Model B-390034 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.