

Design a modern restroom for high traffic, hygienic handwashing.













AUTOMATIC MULTI-FEED SOAP DISPENSING SYSTEM

For foam and liquid soap

Designed for high traffic facilities, the top-fill large capacity soap reservoir feeds up to six soap dispensers.



Eliminates frequent refilling of single dispensers, reducing maintenance time and cost.



Uses bulk soap for significant cost savings of 80% or more over proprietary cartridges.



Touch free sensor reduces cross-contamination risk to patron.



Fill Port Indicators

LED indicator on the fill port lets maintenance staff know when service is needed.



Blinks green when soap level is below 25-30%.




Stops blinking green and warning alarm sounds to signal to stop filling.



If using the optional battery pack, blinks red when batteries are low.



HOW TO SPECIFY

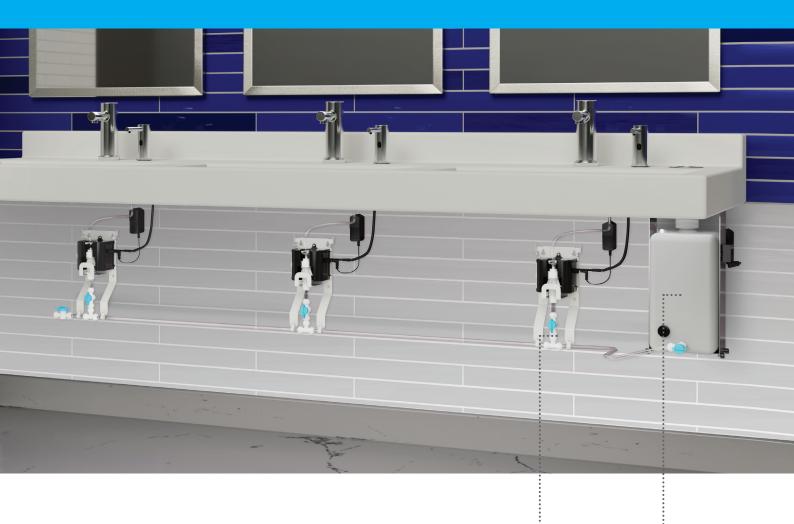

Select a Foam or Liquid Soap System

The multi-feed system includes a 6 L capacity reservoir that feeds up to six automatic soap dispensers.

Select the reservoir, then select either foam or liquid soap.

B-820 Multi-Feed Soap Reservoir and

B-820-248 Foam Soap Dispenser or

B-820-258 Liquid Soap Dispenser



AUTOMATIC MULTI-FEED SOAP DISPENSING SYSTEM

HOW TO ORDER

Select the reservoir, then select either foam or liquid soap.

B-820 MULTI-FEED SOAP RESERVOIR

Capacity 6 Liters

Features Top-fill bulk soap tank, equipped with

service indicator lights, feeds foam or liquid soap for up to six dispensers.

Power 6V AC Adapter Included

B-820-248 FOAM SOAP DISPENSER or B-820-258 LIQUID SOAP DISPENSER

Spout Polished Chrome, 304 Stainless Steel

Pump Wall-Mounted Plastic Pump with

Electronic Control Box

Power 6V AC Adaptor Included

824-241 Optional Battery Pack for Reservoir and Dispenser

Uses 4 "D" Cell Batteries (batteries not included)

Bobrick.co.uk

U.K. Sales Office

+44 (0)20.8366.1771 **uksales@bobrick.com**

U.S. Corporate Office

+1.818.764.1000

international@bobrick.com

INSTALLATION TIPS

- Soap dispenser fits standard 25.4 mm diameter counter hole
- Reservoir fill port requires 60.3 mm diameter counter hole
- Maximum mounting thickness 38 mm.
- All hardware provided.
- Easy-to-follow installation instructions included.

Have a high traffic project?

Find your knowledgeable Bobrick representative at bobrick.com



Brochure No. IAMF February 2023

© 2023 Bobrick Washroom Equipment, Inc.