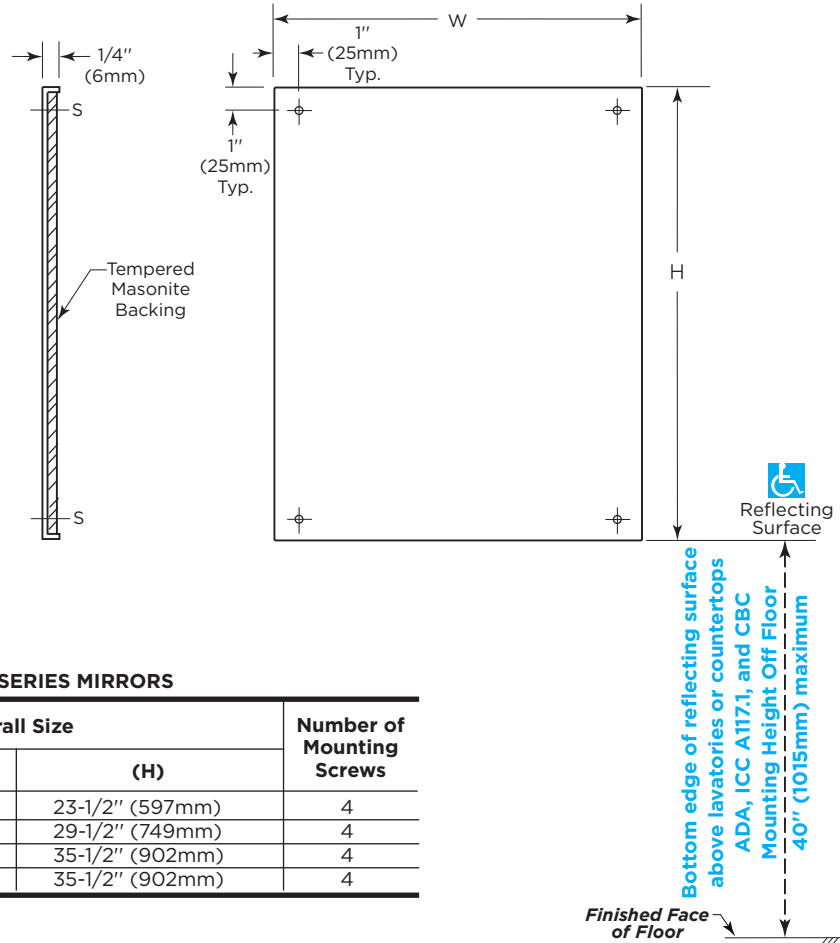


BOBRICK**Technical Data****FRAMELESS
STAINLESS STEEL MIRROR****B-1556
SERIES****STANDARD B-1556 SERIES MIRRORS**

Model No.	Overall Size		Number of Mounting Screws
	(W)	(H)	
B-1556 1824	17-1/2" (445mm)	23-1/2" (597mm)	4
B-1556 1830	17-1/2" (445mm)	29-1/2" (749mm)	4
B-1556 1836	17-1/2" (445mm)	35-1/2" (902mm)	4
B-1556 2436	23-1/2" (597mm)	35-1/2" (902mm)	4

**Installation Guidance**

Maximum mounting height bottom edge of reflective surface above lavatories and countertops:

ADA, ICC A117.1 and CBC: 40" (1015mm) above finished floor (AFF)

*For more information regarding mirror mounting heights, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9 and 15.

MATERIALS:

Mirror — 18-8, type-304, 20 gauge (0.9mm) stainless steel polished to a No. 8 mirror finish. Mirror has 1/4" (6mm) return.

Backing — 1/4" (6mm) thick tempered masonite.

INSTALLATION:

Mount mirror on wall with four #8 oval head screws, furnished by manufacturer, at points indicated by an S. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws furnished, or provide 1/8" (3mm) toggle bolts or expansion bolts.

SPECIFICATION:

Frameless stainless steel mirror shall be 18-8, type-304, 20-gauge (0.9mm) stainless steel polished to a No. 8 mirror finish. Mirror shall have 1/4" (6mm) return concealing 1/4" (6mm) tempered masonite backing. Four corner countersunk holes provide flush fit of mounting screws with mirror surface.

Mirror shall be Model B-1556 _____ (insert width and height) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.